

TPI

# CORRUGATED TPI ROOF TILE

TPI FIBER CEMENT ROOF TILES

Beautiful, Durable and Safe From Asbestos



*TPI White Corrugated Roof Tiles from 'Cool Comfort Series' can reduce the temperature up to 10°C when compared with general tiles*



From Long Experience and Modern Technologies  
to the Perfect Home You Deserve



# TPI FIBER CEMENT CORRUGATED ROOF TILES

SPLENDID STYLES  
BRIGHT COLORS  
VARIOUS SHADES



## SAFE FROM ASBESTOS

TPI Corrugated Roof Tiles are the combination of high quality TPI Cement and extra strong synthetic fibers. By using the contemporary manufacturing technology, the tiles have high durability and long life expectancy without relying on the use of asbestos. Therefore, it guarantees that there is no health concerns under the strong, extraordinary and beautiful roof.

## TPI ROOF TILE ATTRIBUTES

- **HIGH STRENGTH & DURABILITY** With the high density body, the tiles can endure physical decay and heavy impact, hence, they do not have to be replaced repeatedly.
- **EXQUISITE & MODERN** Splendid and outstanding without cracking or splitting and available in a wide range of colors.
- **NO HARMFUL EFFECTS** Contains no asbestos that can cause the respiratory diseases and lung cancer.
- **DO NOT ABSORB HEAT** No more radiation heat, only the cool and peaceful houses.
- **TPI WHITE CORRUGATED ROOF TILES from 'COOL COMFORT Series'** can reduce the temperature more than ordinary roof tiles up to 10°C without using reflective insulation.

### Pearl Colors



Green Pearl



Blue Pearl



Purple Pearl




Red Pearl



Brick Pearl

### Cool Comfort Series



Light Blue



Blossom Pink



White



Bronze



Gold





## Technical Information

### 5 mm. Corrugated Roof Tiles

Characteristics	Size: Length x Width (cm.)	
	120 x 50	150 x 50
Thickness (mm.)	5	5
Weight (kgs./pc.)	5.8	7.3
Quantity (pcs./sq.m.)	2.2	1.7
Minimum Roof Slope (Degree)	10	10
Purlin Gap (cm.)	100	130

### 4 mm. Corrugated Roof Tiles

Characteristics	Size: Length x Width (cm.)	
	120 x 50	150 x 50*
Thickness (mm.)	4	4
Weight (kgs./pc.)	4.6	5.8
Quantity (pcs./sq.m.)	2.2	1.7
Minimum Roof Slope (Degree)	10	10
Purlin Gap (cm.)	100	130



### Standard Sizes

120 x 50 x 0.4 cm., 150 x 50 x 0.4 cm., 120 x 50 x 0.5 cm., and 150 x 50 x 0.5 cm.


- TPI Corrugated Roof Tiles [COOL COMFORT Series] are available in the sizes of 120 x 50 x 0.5 cm. and 150 x 50 x 0.5 cm.
- The colors displayed here may be different from the real colors due to the printing process and can be changed without any advanced notification

### Standard Colors





## TPI DECOR RIDGES

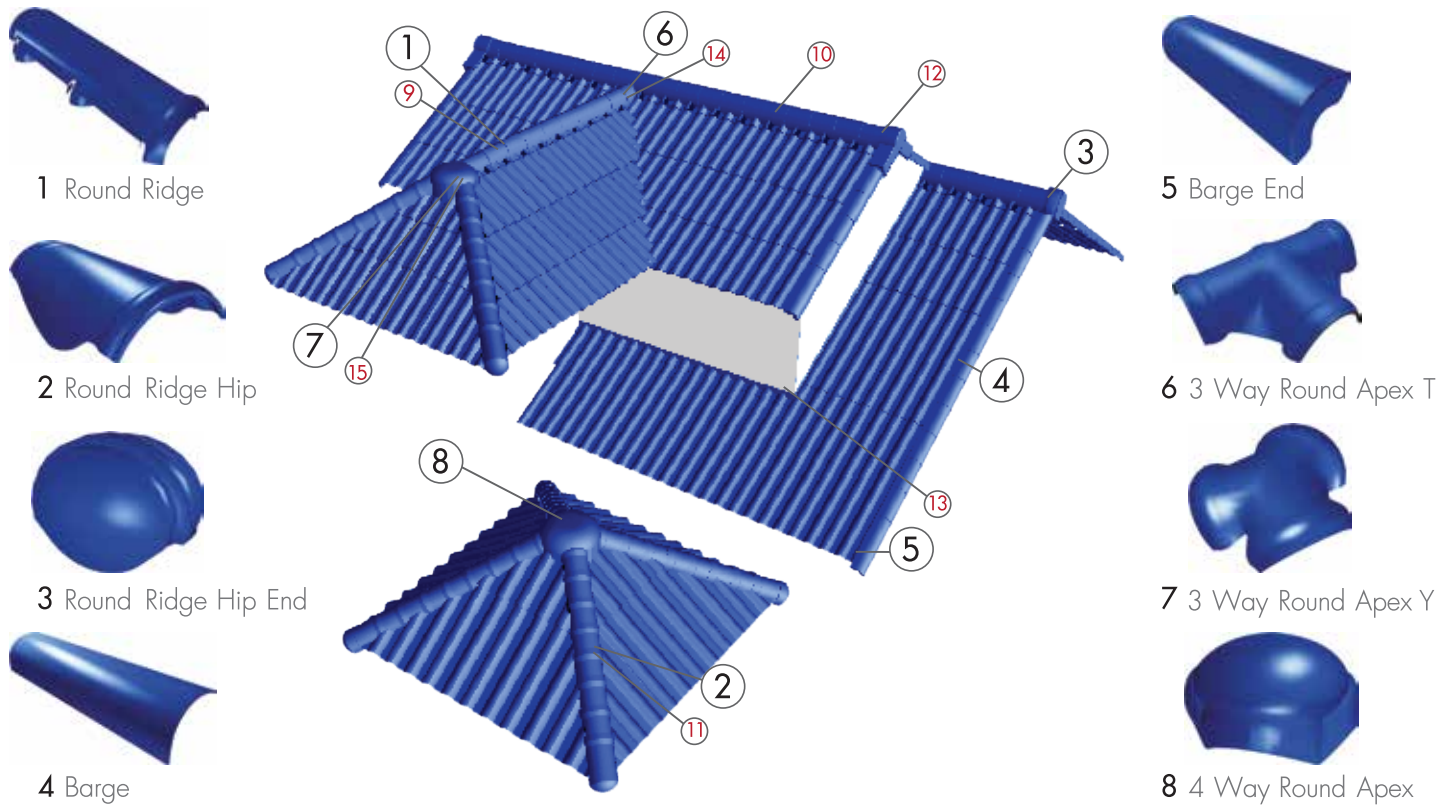

## TPI STANDARD RIDGES



## ROOFING ACCESSORIES




### TPI Self Drilling Screw

Easy-to-install 4 inch drilling screws with large rubber washer head for the better leakage prevention system.




### TPI Ridge Flashing

By using super powerful glue, TPI Ridge Flashing is very strong and high elastic, which can be smoothly placed on the surface of the roofs.




### TPI Corrugated Eave Filler

Manufactured with high durable materials that have a long life expectancy and will not easily twist or shrink, which helps keeping unwanted insects and animals away.



### TPI Galvanized Steel Purlin

Produced with strong and high quality materials, therefore, the purlins do not rust and can endure heavy loads. They should be used together with TPI Self Drilling Screws.



### TPI Zinc Trough Valley

Used at the joints of the roofs and gutters to help drain rain and prevent leakage problems.



### TPI Translucent Corrugated Sheet

Installed with TPI Corrugated Roof Tiles on the areas where natural sunlight is required, for the benefits of cost and energy saving.

